



HP Stream 8 Speakers Replacement

This guide will show how to replace the speakers at the bottom of the HP Stream 8.

Written By: Nick Miller





TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Midframe




- Use your nail or a spudger to pry up the back cover of the device.

Step 2



- Slide your finger around the rest of the back cover, lifting it completely off of the device.

Step 3

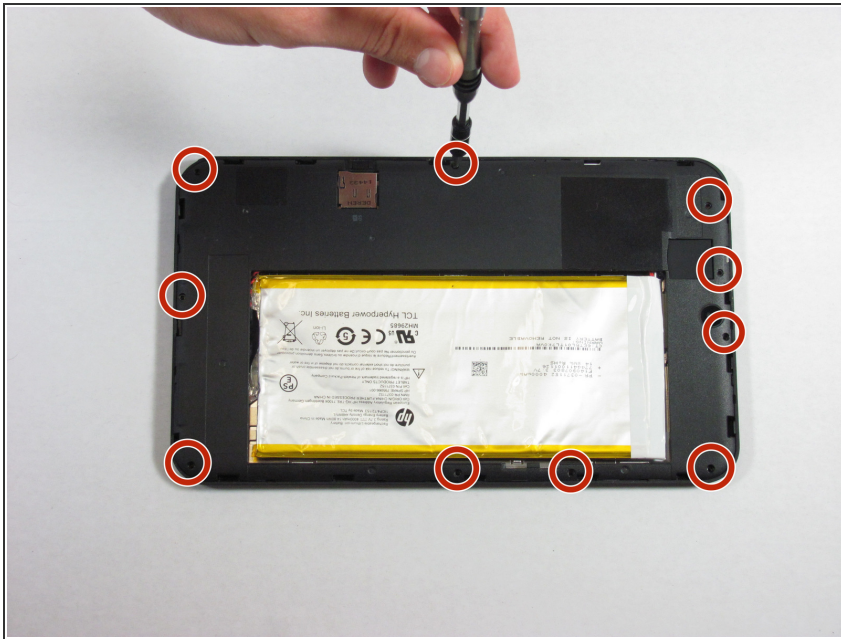

- Remove all ten of the screws on the inside cover using the screwdriver with a PH00 Phillips head.

Step 4



- Pry up the inside cover the same way as in the first step.

Step 5 — Speakers



- Remove the two speakers at the bottom of the device using tweezers.

Step 6



- The power wires are soldered to the board. They must be disconnected, and the replacement speakers re-soldered.
- ⓘ For soldering help, check out iFixit's [How to Solder and Desolder Connections](#) guide.

To reassemble your device, follow these instructions in reverse order.

